




## China Lm8uu Bearing Supplier

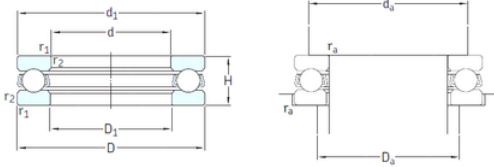

SKF Bearing 51116 51117 51118 51120 51122  
51124 51126 51128 51130m 51132m

Bearing No. 51116

51116 Bearing 2D drawings and 3D CAD models

Size	80x105x19 mm
Bore Diameter	80 mm
Outer Diameter	105 mm
Width	19 mm
d	80 mm
D	105 mm
H	19 mm
d1	105 mm
r1 min.	1 mm
r2 min.	1 mm
D1	82 mm
da min.	95 mm
Da max.	90 mm
ra max.	1 mm
Weight	0,42 Kg
Basic dynamic load rating (C)	44,9 kN
Basic static load rating (C0)	140 kN
Fatigue load limit (Pu)	5,1
Reference speed	3000 r/min
Limiting speed	4300 r/min
Category	Thrust Ball Bearing
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0.43



## China Lm8uu Bearing Supplier

Product Group	B00308
Rolling Element	Ball Bearing
Thrust Bearing	Yes
Single or Double Direction	Single Direction
Banded	No
Cage Material	Steel
Precision Class	ABEC 1   ISO P0
Component Description	Roller Assembly Plus Raceways
Other Features	Single Row
Long Description	80MM Bore 1; 82MM Bore 2; 105MM Outside Diameter; 19MM Height; Ball Bearing; Single Direction; Not Banded; Steel Cage; ABEC 1   ISO P0 Precision
Inch - Metric	Metric
Category	Thrust Ball Bearings
UNSPSC	31171507
Harmonized Tariff Code	8482.10.50.08
Noun	Bearing
Keyword String	Ball Thrust
Manufacturer URL	<a href="http://www.skf.com">http://www.skf.com</a>
Manufacturer Item Number	51116
Weight / LBS	0.948
Overall Height with Aligning Washer	0 Inch   0 Millimeter
Bore 2	3.228 Inch   82 Millimeter
Outside Diameter	4.134 Inch   105 Millimeter
Height	0.748 Inch   19 Millimeter
Bore 1	3.15 Inch   80 Millimeter
bore diameter:	80 mm
static load capacity:	140 kN
outside diameter:	105 mm



## China Lm8uu Bearing Supplier

dynamic load capacity:	44.9 kN
overall width:	19 mm
maximum rpm:	4300 RPM
thrust bearing type:	Single-Direction
cage material:	Steel
outside diameter design:	Straight
fillet radius:	1 mm
separable or banded:	Separable
series:	511
precision rating:	ABEC 1 (ISO Class Normal)
$d_1$	105 mm
$D_1$	82 mm
$r_{1,2}$ min.	1 mm
$d_a$ min.	95 mm
$D_a$ max.	90 mm
$r_a$ max.	1 mm
Basic dynamic load rating C	44.9 kN
Basic static load rating $C_0$	140 kN
Fatigue load limit $P_u$	5.1 kN
Minimum load factor A	0.12
Mass bearing (including seat washer where applicable)	0.42 kg